

+

UTILITY PATENT APPLICATION TRANSMITTAL

Use only for new nonprovisional applications under 37 CFR 1.53(b)

Attorney Docket No. 35.C14405

First Named Inventor or Application Identifier

JUNICHIRO KIZAKI

Express Mail Label No.

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

☒ Fee Transmittal Form

(Submit an original, and a duplicate for fee processing)

6. ☐ Microfiche Computer Program (Appendix)

2. ☒ Specification Total Pages 41

7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

3. ☒ Drawing(s) (35 USC 113) Total Sheets 12

a. ☐ Computer Readable Copy

4. ☒ Oath or Declaration Total Pages 1

b. ☐ Paper Copy (identical to computer copy)

c. ☐ Statement verifying identity of above copies

a. ☒ Newly executed (original or copy)

b. ☐ Unexecuted for information purposes

c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)

[Note Box 5 below]

d. ☐ DELETION OF INVENTOR(S)

Signed Statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of the
oath or declaration is supplied under Box 4c, is considered as being
part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))

9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)

10. ☐ English Translation Document (if applicable)

11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS
Citations

12. ☐ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)

14. ☐ Small Entity ☐ Statement filed in prior application
Statement(s) Status still proper and desired

15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)

16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. ____/____

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514

(Insert Customer No. on Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	44-20 =	24	X \$ 18.00 =	\$432.00
	INDEPENDENT CLAIMS (37 CFR 1.16(b))	7-3 =	4	X \$ 78.00 =	\$312.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$0
				BASIC FEE (37 CFR 1.16(a))	\$690.00
				Total of above Calculations = \$1434.00	
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
				TOTAL =	\$1434.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 1434.00 to cover the filing fee is enclosed.

21. ☒ A check in the amount of \$ 40.00 to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	LEONARD P. DIANA (Reg. 29,296)
SIGNATURE	<i>LP.2</i>
DATE	April 6, 2000

IMAGE PROCESSING METHOD, APPARATUS, SYSTEM
AND STORAGE MEDIUM

BACKGROUND OF THE INVENTION

5 Field of the Invention

The present invention relates to an image processing when delivering data between the apparatuses which are connected to one another through a network.

Related Background Art

10 Heretofore, some of image processing apparatuses which are connected through a network can instruct a reader which is connected to other machines on the network to read out an image to receive the image thus read out through the network. In addition, in recent
15 years, the case of handling color images has been increased so that the amount of image data has been increased. Then, when reading out the large color image to carry out the delivery of the color image through a network, it has also become possible that by
20 taking a load of the network into consideration, the OCR (Optical Character Reader) processing of analyzing and recognizing previously the text data is executed in the machine, on the network, which has read out the image, and for the area which has been recognized as
25 the text data, the text data after the recognition is employed instead of the image data, while with respect to the area as other than the text, the image which has

been read out is transmitted by employing the image which has been compressed to be made small by the suitable compression method.

5 SUMMARY OF THE INVENTION

While as described above, in the prior art, it is possible to make the image data to be delivered small to reduce the load with which the network is burdened, the data which has been converted into only the text by
10 executing the OCR processing in another machine on the network, when an error is present in the area judgement or the like, can not be corrected in the machine becoming the client which has received the data of interest. For example, when the area of the vertical
15 writing is misidentified as the area of the horizontal writing, it is difficult that thereafter, the text data is corrected on the machine side becoming the client. In addition, when the continuous areas are respectively judged to be the different areas, after completion of
20 the conversion into the text data, it is impossible to carry out the analysis therefor.

In order to solve the above-mentioned problems associated with the prior art, the present invention provides an image processing method, an apparatus and a
25 storage medium, wherein data which has been transmitted from an apparatus connected thereto through a network is received; the format of the data thus received is

judgement step that the format of the received data is the data format which has been subjected to the area division processing, when the correction of the area division is instructed by a user, the correction of the area division is carried out.

In order to solve the above-mentioned problems, the present invention provides an image processing method, an apparatus and a storage medium, wherein an instruction of the data format issued from an apparatus which is connected through a network is received; the processings up to a predetermined stage of the processings of a plurality of stages, for image data, are executed in accordance with the data format; and the data which has been processed is transmitted to the apparatus.

In order to solve the above-mentioned problems, according to the present invention, preferably, an instruction to read out the data is received together with the instruction of the data format, and the processing of reading out the image data is started in accordance with the instruction to read out the data.

In order to solve the above-mentioned problems, according to the present invention, preferably, the processings of a plurality of stages include the data division of the image data and the character recognition.

In order to solve the above-mentioned problems,

according to the present invention, preferably, the processing of dividing the area of the image data is executed.

In order to solve the above-mentioned problems,
5 according to the present invention, preferably, the binarization processing is executed for the text area of the image data.

In order to solve the above-mentioned problems,
according to the present invention, preferably, the
10 image data is the image data which has been read out through a scanner.

In order to solve the above-mentioned problems,
according to the present invention, there is provided
an image processing system to which a first image
15 processing apparatus and a second image processing apparatus are connected through a network,

wherein the second image processing apparatus, for
image data, executes the processings up to a
predetermined step of the processings of a plurality of
20 stages in accordance with a predetermined data format to transmit the data for which the processings up to the predetermined stage have been executed to the first image processing apparatus; and

the first image processing apparatus which has
25 received the data for which the processings up to the predetermined step have been executed judges the data format of the received data to execute the unexecuted

processing(s) for the received data to output the data for which the unexecuted processing(s) has(have) been executed.

5 In order to solve the above-mentioned problems, according to the present invention, preferably, the predetermined data format is the data format which is instructed from the first image processing apparatus to the second image processing apparatus.

10 In order to solve the above-mentioned problems, according to the present invention, preferably, the processings of a plurality of stages include the area division of the image data and the character recognition.

15 In order to solve the above-mentioned problems, according to the present invention, preferably, the processings up to a predetermined stage which are executed in the second image processing apparatus include the area division; and

20 the unexecuted processing(s) which is(are) executed in the first image processing apparatus include(s) the character recognition.

In order to solve the above-mentioned problems, according to the present invention, preferably, further, the first image processing apparatus, for the data for which it is judged by the judgement means that the format of the received data is the format of the data for which the area division processing has been

25

executed, when the correction of the area division is instructed by a user, can carry out the correction of the area division.

5 In order to solve the above-mentioned problems, according to the present invention, preferably, the second image processing apparatus starts the processing of reading out the image data in accordance with an instruction to read out the data which has been issued from the first image processing apparatus.

10 In order to solve the above-mentioned problems, according to the present invention, preferably, the second image processing apparatus executes the binarization processing of the text area of the image data in accordance with the predetermined data format.

15 In order to solve the above-mentioned problems, according to the present invention, preferably, the image data is the image data which has been read out through a scanner.

20 Other features and advantages of the patent invention will be apparent from the following description taken in conjunction with the accompanying drawings, in which like reference characters designate the same or similar parts throughout the figures thereof.

25

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing a configuration

of an apparatus according to the present invention;

Fig. 2 is a diagram showing an example of
structure of a general purpose image data format;

Fig. 3 is a diagram showing an example of
5 structure of an O-PAF data format;

Fig. 4 is a diagram showing an example of
structure of an I-PAF data format;

Fig. 5 is a diagram showing a sample image;

Fig. 6 is a diagram showing an example of the
10 result of recognizing an area of the sample image;

Fig. 7 is a diagram showing an example of
correcting the area recognition of the sample image;

Fig. 8 is a flow chart showing the whole
processing of the character recognition;

Fig. 9 is a flow chart showing the processing on a
15 client machine side;

Fig. 10 is a flow chart showing the processing on
a server machine side;

Fig. 11 is a block diagram showing a configuration
20 of an apparatus according to the present invention;

Fig. 12 is a diagram showing an example of an
apparatus selection picture;

Fig. 13 is a diagram showing an example of a data
format selection picture; and

Fig. 14 is a diagram showing a configuration of a
25 network system.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The preferred embodiments of the present invention will hereinafter be described in detail with reference to the accompanying drawings.

5 Fig. 1 is a block diagram showing a configuration of an apparatus according to the present invention.

 A system bus 1 makes possible the transmission of data between the constituent elements as will be described later. A CPU (Central Processing Unit) 2
10 executes the various kinds of processings according to the present invention in accordance with a control program which is stored in a PMEM 3 as will be described later. The processings which are shown in a flow chart as will described later are also executed by
15 the CPU 2. The PMEM (memory) 3 is the memory for suitably selecting and reading out the control program for the various kinds of processings according to the present invention from a hard disk 10 to store therein the control program thus read out therefrom. The
20 control program for the processings shown in a flow chart as will be described later is also stored in this PMEM 3. In addition, the PMEM 3, in addition thereto, functions as a text memory and hence also stores therein the text data which has been inputted through a
25 keyboard 12 and the text data which has been read out from an external storage medium 9 or a hard disk 10 in accordance with the control made by an external memory

control device 8. A communication control portion 4 carries out the control for the I/O data in a communication port 5. The communication port 5, in accordance with the control made by the communication control portion 4, is connected to a communication port 7 which another apparatus on a network has through a communication line 6 such as a LAN or a WAN to carry out the transmission and the reception of the data. The sending of the printed data to a printer connected to the network as well as the input of the data from a scanner connected to the network are carried out through this communication port 5.

The external memory control device 8 controls the operation of reading out/writing the data from/to a memory for the data file, e.g., a hard disk (HD) 10 or an external storage medium (such as a floppy disk, an MO or a CD-R) 9 which is removably attached to the present apparatus. An input control portion 11 controls the operation of inputting the data through an input device such as a keyboard 12 or a mouse 13. In this connection, the mouse 13 may function as the coordinate inputting means through which the coordinates of the position indicated on the display screen of a CRT 16 and hence a tablet, a touch panel or the like may be employed as the coordinate inputting means instead of the mouse 13. In addition, the coordinate inputting means may have only to be able to

carry out the selection and the indication on the basis of the operation of pressing down a button or a tap in the indicated coordinate position. By manipulating the mouse, the indicated position which is displayed by a mouse cursor is made in the desired position, e.g., is located on a command icon on the command menu to press down the button, whereby it is also possible to input the command which is represented by that command icon. In addition, the indication of the editing object and the indication of the drawing position can also be carried out with the mouse 13. An operator carries out the operation of inputting the character code and inputting the various kinds of operation instructions by manipulating the keyboard 12.

A video image memory (VRAM) 14 is a memory for holding therein the image which is to be displayed on a display device such as a CRT, and the display data is developed into the bit map data to be written thereto to be displayed on the CRT 16 in accordance with the control made by a display output control portion 15. In this connection, the display device is not limited to the CRT and hence may also be a liquid crystal display device. A printer control portion 17 carries out the output control for the data to a printer 18 connected thereto. The printer 18 functions as the means for printing an image and is an LBP, an ink jet printer or the like. An image input device control

portion 20 carries out the control for an image input device 21 connected thereto. The image input device 21 may be either a scanner for reading optically a manuscript which is set or a film scanner. Or, the image input device 21 may also be the device for carrying out the function of reading out image data from the memory in which the image data has been stored. While in Fig. 1, the printer control portion 17 and the printer 18, and the image input device 21 and the image input device control portion 20 are shown in the form of the different constituent elements, it is to be understood that those may be either the different components or one component.

Figs. 2 to 4 are respectively examples of the various kinds of data structure into which the image data is converted to be produced.

Fig. 2 is an example of a general purpose image data format.

This data format is constituted by the incidental information such as size (201) and resolution (202) of the image data, and image data (203) which has been read out. The image data part which has been read out may be the data which has been compressed by the suitable compression method in some cases. This data format is the data format which a large number of general application softwares can handle and has the wide application.

Fig. 3 is an example of the data structure after having subjected the read out image data to the OCR (Optical Character Recognition) processing. In this case, it is assumed that this data format is called the O-PAF format. This data format is constituted by size (301) of the whole image data, resolution (302), and data (329, 321) every block of each of the data blocks (areas) which have been extracted on the basis of the image features of the image. The data of the area which has been judged to be the text area (the text data 320) is constituted by size (303) of that text area, a position (304), a type set direction (305) of the text in the block, and character data 323 into which the data which has been extracted from one character image is arranged. Candidate characters (306, 307) of the result of recognizing the characters, size (309) of the character, a font (308) and decoration information (310) are stored in this character data 232. Image data 321 in which the data of the area (the image area) which has not been judged to be the text area is stored includes size (311) of that image area, an image position (312) and image data (313) of that area. The image data may be compressed by the suitable compression method in some cases. In this data format, with respect to the part (such as the noise, or the background part) except for the image and the rectangular area which has been recognized as the

0545496:040700

text, it is omitted to store the data (i.e., that part is not left as the data). In addition, in the text area, the image data is not stored, but only the text data is stored. Therefore, the data size can be greatly reduced as compared with the original data.

Fig. 4 is the data structure in which the read out image data is not converted into the text, but is left as it is. In this case, it is assumed that this data format is called the I-PAF format. This data format is constituted by size (401) of the whole image data, resolution (402), and block data (410, 411) exhibiting the data of the data blocks which has been extracted on the basis of the image features of the image (the text part and the image part). Of the data blocks (the areas), text part data 410 as the data of the area which has been judged to be the text area includes size (403) of that area, a position (404) and image data (405) which has been obtained by binarizing the image data in that area. The image data 405 may become the data which has been compressed by the suitable compression method in some cases. The image part data 411 as the data of the area (the image area) which has not been judged to be the text area includes size (406) of that area, a position (407) and image data (408) in that area. The image data 408 may become the data which has been compressed by the suitable compression method in some cases. In this data format, with

respect to the part (such as the noise or the background part) except for the image and the rectangular area which has not been recognized as the text, the data is omitted and in addition thereto, the image data is binarized in the text area. Therefore, the data size can be greatly reduced as compared with the original data. In addition thereto, thereafter, the image of the text area as well as the image of the image area can be reproduced and also can be utilized for the editing or the like.

Fig. 5 is one sample of the image data.

This sample includes the data of the text, the image, the table, the graphic form and the like. This image is extracted as the rectangular area which is judged on the basis of the image features to be one unity. Each of the areas (the blocks) which have been extracted includes a text area which has been judged to be only the text, and a table area which is constituted by the text and the table (the straight lines which are drawn vertically and horizontally). Also, when the element other than the text area and the table area is included, it is judged to be the image area. With respect to the method of judging whether or not the text is included in the block, the well known technique is utilized.

Fig. 6 is a diagram in which each of the areas which have been extracted from the sample image data

shown in Fig. 5 is indicated by the dotted line.

The block 66, in the simplified character recognizing processing, is judged not to include the text and is judged to be the image area since any of the characters is not recognized, i.e., any of the repair characters having the high similarity measure is not obtained.

A block 61 and a block 62 are extracted as the different text areas since the size of the characters in the block 61 is different from that in the block 62. A block 63 and a block 65 are extracted as the areas different from each other since the blank space between the block 63 and the block 65 is large. A block 64 is not recognized as the text, but is recognized as the image area since each of the characters is considerably thick and the size of the characters is also considerably large.

Fig. 7, in contrast with the image data in which the areas are extracted as shown in Fig. 6, is a diagram of the result of defining the areas.

The boundaries exhibiting the areas which are extracted as shown in Fig. 6, and the information exhibiting the kinds (the text, the image, the table, the graphic form and the like) which are discriminated for the areas are displayed on the CRT 16 with the boundaries and the information superimposed on the read image, and the area definition made by an operator is

instructed, thereby carrying out the reperception.
Since though the block 63 and the block 65 is seemingly
separated, both of the blocks are the data of one area,
it is instructed to recognize the two blocks as one
5 block (a block 73). In addition, the block 64 is
specified as the text area, thereby being recognized as
the text (a block 74).

Fig. 8 is a flow chart showing the whole image
analyzing processing ranging from the processing of
10 reading out the image up to the processing of producing
the O-PAF data.

The image is read out by a reader (Step S81) and
then is converted into the general purpose image data
format (refer to Fig. 2) by a reader control module
15 (Step S82).

For the general purpose image data, the data
existing part is extracted as the rectangular part with
the blank space having no data as the break to carry
out the block extraction (Step S83). The simplified
20 character recognizing processing is executed for the
image data in each of the rectangular areas to judge
whether or not the image data is the area in which the
texts are assembled. With respect to the area which
has been judged to be the text area, the color
25 information in that area is binarized (Step S85). The
processing until now is called the area analyzing
processing, and the I-PAF data (refer to Fig. 4) is

produced from the image of the text area which has been binarized and the image of the image area in which the color information is held (Step S86).

5 The image data of the text area for which the area
analyzing processing has been executed is then
subjected to the character recognizing processing (Step
S87). Then, the character recognizing processing is
applied to only the binarized text area. With respect
to each of the character images in the area, the
10 character code, the candidate character code, the
character size, the character color and the like of the
text are extracted to store those attributes together
with the character code to produce the O-PAF data (Step
S88). Above, the processing of the O-PAF producing
15 portion as the character recognizing processing has
been described.

Fig. 9 is a flow chart showing the processing on
the client machine side.

20 In the client machine, the machine (the server
machine) to which the image reader for reading out the
image is connected is selected among the machines on
the network (Step S901). The selected picture at this
time is shown in Fig. 12. The information relating to
the desired reader which is connected to the network is
25 inputted to a selection frame 1201. In addition, if
the data format when transferring the data from the
server machine on the network to the client machine is

specified (Step S902), then the picture is displayed which is used to select the data format as shown in Fig. 13 to urge an operator to select the data format which will be transferred. In this connection, the data format is selected among the following three kinds of data formats. The first data format is an image data format 1301 which is generally used. While this general purpose image data format can be handled in a large number of applications, when reading out the image with the full color, the data amount is greatly increased so that the network is burdened with the load. The second data format is an I-PAF data format 1302 in which the image part which has been judged to be the text area is constituted by the data which is previously binarized by the server machine on the network, while the image part which is judged to be the image area is constituted by the data in which the color information is held. The second data format has the merit that the size of the image data can be made small as compared with the first general purpose image data format. The last data format is an O-PAF data format 1303 in which with respect to the part which is judged to be the text area, the character recognizing processing is previously executed by the server machine on the network to make that part the data of the character code. In the case of the final data format, the amount of character data can be extremely reduced

as compared with the amount of image data. But, when the error is present in the analysis of the area, it is impossible to correct the error by the client machine and hence the rereading is carried out again.

5 Therefore, this may not be fitted to the complicated document in some cases. When above, the two selections in Step S901 and Step S902 have been carried out, the instruction to carry out the image reading is issued to the apparatus (the server machine) which has been selected in Step S901 (Step S903). The instruction to start the processing of reading out the image data and to specify the data format is sent to the server machine which is connected to the specified reader through the network and then the data which has been converted into the specified data format is returned back thereto (the operation, in the server machine, of reading out the image data will be described later).

The client machine receives the data which has been read out to be processed by the server in accordance with the specified method (Step S904). After the reception of the data, the format of the data which has been received, i.e., the specified data format is judged (Step S905) to execute the individual processings. First of all, when having received the general purpose image data, the area is analyzed (Step S906). The result of analyzing the area is displayed on the screen, and when unpreferable, the proper area

and kind are set by the correction work by a user. In addition, in the case as well where the image data is sent in accordance with the I-PAF format, No is instructed in Step S907 so that the binarized image data is held in the text area. Therefore, it is possible to carry out again the analysis. With respect to the part which has been judged to be the different text area, it is also possible to set that part as one area or conversely to divide one area.

10 Thereafter, the character recognizing processing is executed (Step S908). At this time as well, the analysis result is displayed on the screen, and when it is judged by an operator that the analysis result is unpreferable, it is possible to carry out a certain
15 kind of setting (Step S909). For example, it is possible to execute the processing of re-perception of the vertical type set the area which has already been recognized as the horizontal type set.

 After having executed the character recognizing
20 processing, an operator confirms whether or not the characters become the desired recognition result (Step S901). Then, if it is confirmed that the characters do not become the desired recognition result, then an operator retrieves among the candidate characters or
25 carries out the reinput (Step S911). If such a correction has been completed, then the production of the document will be completed. The data thus produced

is outputted to the CRT 16, the printer 18 or the external storage medium 9 in accordance with the instruction to carry out the display, the printing or the storage.

- 5 If it is judged in Step S905 that the image data of the I-PAF format has been received, then the processing proceeds to Step S907. On the other hand, if it is judged in Step S905 that the image data of the O-PAF format has been received, then the processing
- 10 proceeds to Step S910.

Fig. 10 is a flow chart showing the processing, on the server machine side, of reading out the image data in accordance with the instruction to read out the image data in Step S903.

- 15 The machine, becoming the server, to which the specified reader is connected receives the specification of the format of the data to be transmitted and the instruction to carry out the image reading (Step S1001). The reader control module
- 20 corresponding to the specified reader is manipulated to read out the image (Step S1002) to produce the general purpose image data (Step S1003). When the general purpose image data format is specified by the client machine, it is judged in Step S1004 that the area
- 25 analysis is not carried out (NO) and the read out image data having the general purpose image data format (refer to Fig. 2) to which the size and the resolution

0055185-040700

of the image is added as the attendance information is transferred to the client (Step S1008). On the other hand, when it is judged in Step S1004 that the area analysis is carried out (YES)(Steps S1004, S1005), the part in which the data is judged to be continuous is divided as the rectangular areas. Then, it is judged whether or not each of the rectangular areas is constituted by the text, and then the rectangular area is divided into the text area and the image area.

10 Thereafter, for the text area, the image is binarized to reduce the amount of data. The binarized text image and other images are collected and arranged to be produced as the data (refer to Fig. 4) which is constituted by the size and the resolution of the whole

15 image, and the size and the position of each of the areas. When the data of the I-PAF format is specified from the client machine, it is judged in Step S1006 that the character recognition is not carried out (NO) and at this time point, the data is transferred (Step

20 S1008). When it is specified that up to the character recognition is carried out, with respect to the text area, the text is recognized by the suitable character recognition algorithm to extract each of the character data (Step S1007). Each of the character data is

25 constituted by the character size, the font, the decoration information and the like. These elements are collected and arranged into the data of the O-PAF

00545405-040700

format (refer to Fig. 3) to be transferred (Step S1008).

Fig. 11 is a block diagram showing an example of a configuration of the present embodiment.

5 In the present embodiment, when delivering the data in the I-PAF data format, it is sufficient for the server machine to be provided with an I-PAF conversion module at the minimum and for the client machine to be provided with an O-PAF conversion module at the
10 minimum. However, if other data format may be selected from the situation of using the network or the like, then the two processing portions need to be included in both of the server machine and the client machine.

Fig. 14 shows a network system according to the present invention. The server and the client shown in
15 Fig.11 are realized on such a network. The network system will hereinbelow be described in detail.

Fig. 14 is a diagram showing a configuration of a network system in the case where a network board (NB)
20 101 through which a printer to be connected to the network is coupled to a printer 102 having an open type architecture. The NB 101 is connected to a Local Area Network (LAN) 100 through an Ethernet interface 10Base-2 having a coaxial connector, or a LAN
25 interface, such as a 10Base-T, having an RJ-45 for example.

A plurality of personal computer (PCs) such as a

PC 103, a PC 111, a PC 112 and a PC 115 are connected to the LAN. Under the control made by a network operating system, those PCs can communicate with the NB 101 and also can function as the devices which are
5 connected to the network. In addition, for example, the PC 103 can be specified in such a way as to be used as the PC for managing the network devices. Also, the printing processing in the printer 102 or a printer 105 which is locally connected to the PC 104 may be
10 controlled by that PC 103.

In addition, a file server 104 is connected to the LAN 100. Then, a file server 106 is accessed through the LAN 100 in accordance with the instruction which has been inputted on the display screen of the PC 104
15 to manage the operation of reading out/writing/storing the data from/to/in the file which is stored in a network disk 107 having a large capacity (e.g., ten billion bytes). The file server PC 104, as the file managing portion, carries out the reception, the
20 storage, the queuing, the caching and the transmission of the data file between the LAN members. For example, the data files which have been produced by the PC 104 itself or the PC 103 are sent to the file server 106 under the control made by the file server PC 104.
25 Then, the file server 106 arranges those data files in order and then transmits the data files thus arranged to a printer 110 in accordance with the command issued

from the print server 104.

A scanner server 115 controls a scanner 117 which is locally connected thereto and a scanner 110 which is located at a distant place in such a way that the
5 scanners 117 and 110 carry out the input of the image. A copying machine 118 is coupled to the LAN 110 through an image processing unit 119 and also functions as a scanner or a printer under the control made by the PC which is connected thereto through the network 110.

10 In addition, each of the PC 103 and the PC 104 is constructed by the normal PC which can carry out the generation of the data file, the transmission of the generated file to the LAN 100, the reception of the file from the LAN 100, and the display and the
15 processing of such a file. In this connection, while the personal computer apparatuses are shown in Fig. 14, alternatively, other computer apparatuses may also be available which are suitable for executing the network software. In general, the LAN such as the LAN 100 or
20 the LAN 110 presents the service to the rather local user group such as the user group in one floor or a plurality of floors in one building. However, alternatively, a Wide Area Network (WAN) may also be established as a certain user goes away from other
25 users as in the situation in which a user is located in another building or another prefecture. The WAN is basically the aggregate which is constructed in such a

00545135-040700

way that some LANs are connected through the high speed digital line such as the high speed Integrated Services Digital Network (ISDN) telephone line. Therefore, as shown in Fig. 14, the LAN 100, the LAN 110 and the LAN 120 are connected through a back bone 140 to construct the WAN. Those connections are the simply electrical connections using several buses. Each of those LANs includes the dedicated PC, and while not necessarily required, in general, includes the file server and the print server. The apparatuses which are respectively connected to the LAN 100, the LAN 110 and the LAN 120 can access to the functions of the apparatus of other LANs through the WAN.

By executing the processings as described above, the analysis of the image data which has been read out is carried out; the rectangular area which has been recognized as the text area is binarized; and the rectangular area which has been recognized as the image area other than the text is compressed by utilizing some compression method or other to transmit the data with the data compressed, whereby the load with which the network is burdened can be reduced, and also even when the area division has been wrongly carried out, the editing such as the reanalysis of the area can be carried out on the client machine which has received the data.

While the present invention has been particularly

2025 RELEASE UNDER E.O. 14176

shown and described with reference to the preferred
embodiments and the specified modifications thereof, it
will be understood that the various changes and other
modifications will occur to those skilled in the art
5 without departing from the scope and true spirit of the
invention. The scope of the invention is therefore to
be determined solely by the appended claims.

002040-5615450

WHAT IS CLAIMED IS:

1. A method of processing an image comprising the steps of:

receiving data which has been transmitted from an
5 apparatus which is connected through a network;
judging the format of the data which has been
received;
executed the unexecuted processing(s) for the data
in accordance with the data format thus judged; and
10 outputting the data for which said processing has
been executed.

2. An image processing method according to claim
1, wherein the data format to be judged is the data
15 format which is instructed to said apparatus which is
connected through said network.

3. An image processing method according to claim
1, wherein the data to be received is the data which is
20 produced by analyzing the image.

4. An image processing method according to claim
1, wherein the received data is the data for which the
processings up to a predetermined stage of the
25 processings of a plurality of stages have been
executed, and also the subsequent processings are
executed for the received data in said processing step.

5. An image processing method according to claim 1, wherein the character recognizing processing is executed for the received data in said processing step.

5 6. An image processing method according to claim 1, further comprising the area division correcting step of, for the data for which it is judged in the judgement step that the format of the received data is the data format which has been subjected to the area
10 division processing, when the correction of the area division is instructed by a user, carrying out the correction of the area division.

7. A method of processing an image comprising the
15 steps of:

receiving an instruction having a data format which has been issued from an apparatus which is connected through a network;

20 executing, for the image data, the processings up to a predetermined stage of the processings of a plurality of stages in accordance with the data format; and

transmitting the data which has been processed in said processing step to said apparatus.

25

8. An image processing method according to claim 7, wherein an instruction to read out the data is

received together with the instruction of the data format in said instruction receiving step; and

said method further comprises the reading step of starting the processing of reading out the image data in accordance with the instruction to read out the data.

9. An image processing method according to claim 7, wherein the processings of a plurality of stages include the data division of the image data and the character recognition.

10. An image processing method according to claim
7, wherein the processing of dividing the area of the
15 image data is executed in said processing step.

11. An image processing method according to claim 7, wherein the binarization processing is executed for the text area of the image data in said processing step.

12. An image processing method according to claim 7, wherein the image data is the image data which has been read out through a scanner.

25

13. An image processing apparatus comprising:
reception means for receiving data which has been

transmitted from an apparatus which is connected
through a network;

judgement means for judging the format of the data
which has been received;

5 processing means for executing the unexecuted
processing(s) for the data in accordance with the data
format thus judged; and

output means for outputting the data for which
said processing has been executed.

14. An image processing apparatus according to claim 13, wherein the data format to be judged is the data format which is instructed to said apparatus which is connected through said network.

15. An image processing apparatus according to claim 13, wherein the data to be received is the data which is produced by analyzing the image.

16. An image processing apparatus according to claim 13, wherein the received data is the data for which the processings up to a predetermined stage of the processings in a plurality of stages have been executed, and said processing means executes the subsequent processings for the received data.

17. An image processing apparatus according to

claim 13, wherein said processing means executes the character recognizing processing for the received data.

5 18. An image processing apparatus according to claim 13, further comprising area division correcting means for, for the data for which it is judged by said judgement means that the format of the received data is the data format which has been subjected to the area division processing, when the correction of the area
10 division is instructed by a user, carrying out the correction of the area division.

19. An image processing apparatus comprising:
instruction receiving means for receiving an
15 instruction of a data format which has been issued from an apparatus which is connected through a network;
processing means for executing, for image data, the processings up to a predetermined stage of the processings having a plurality of stages in accordance
20 with the data format; and
transmission means for transmitting the data which has been processed in said processing means to said apparatus.

25 20. An image processing apparatus according to claim 19, wherein said instruction receiving means receives, together with the instruction for the data

format, an instruction to read out data, and

said image processing apparatus further comprises
reading means for starting to read out the image data
in accordance with the instruction to read out the
5 data.

21. An image processing apparatus according to
claim 19, wherein the processings of said plurality of
stages include the area division of the image data and
10 the character recognition.

22. An image processing apparatus according to
claim 19, wherein said processing means executes the
processing of dividing the area of the image data.
15

23. An image processing apparatus according to
claim 19, wherein said processing means executes the
binarization processing for the text area of the image
data.
20

24. An image processing apparatus according to
claim 19, wherein the image data is the image data
which has been read out from a scanner.

25. An image processing system to which a first
image processing apparatus and a second image
processing apparatus are connected through a network,
25

wherein said second image processing apparatus executes, for image data, the processings up to a predetermined step of the processings of a plurality of stages in accordance with a predetermined data format to transmit the data for which the processings up to the predetermined stage have been executed to said first image processing apparatus; and

said first image processing apparatus which has received the data for which the processings up to the predetermined step have been executed judges the data format of the received data to execute the unexecuted processing(s) for the received data to output the data for which the unexecuted processing(s) has(have) been executed.

15

26. An image processing system according to claim 25, wherein the predetermined data format is the data format which is instructed from said first image processing apparatus to said second image processing apparatus.

20

27. An image processing system according to claim 25, wherein the processings of a plurality of stages include the area division of the image data and the character recognition.

25

28. An image processing system according to claim

25, wherein the processings up to a predetermined stage which are executed in said second image processing apparatus include the area division; and

the unexecuted processing(s) which is(are)
5 executed in said first image processing apparatus include(s) the character recognition.

29. An image processing system according to claim
25, wherein said first image processing apparatus, for
10 the data for which it is judged by said judgement means that the format of the received data is the format of the data for which the area division processing has been executed, when the correction of the area division
is instructed by a user, can carry out the correction
15 of the area division.

30. An image processing system according to claim
25, wherein said second image processing apparatus starts the processing of reading out the image data in
20 accordance with an instruction to read out the data which has been issued from said first image processing apparatus.

31. An image processing system according to claim
25 25, wherein said second image processing apparatus executes the binarization processing of the text area of the image data in accordance with the predetermined

2025 RELEASE UNDER E.O. 14176

data format.

32. An image processing system according to claim
25, wherein the image data is the image data which has
5 been read out through a scanner.

33. A storage medium for storing therein an image
processing control program which can be read out by a
computer, said image processing control program
10 comprising the steps of:

receiving data which has been transmitted from an
apparatus which is connected through a network;

judging the format of the data which has been
received;

15 executed the unexecuted processing(s) for the data
in accordance with the data format thus judged; and

outputting the data for which said processing has
been executed.

20 34. A storage medium according to claim 33,
wherein the data format to be judged is the data format
which is instructed to said apparatus which is
connected through said network.

25 35. A storage medium according to claim 33,
wherein the data to be received is the data which is
produced by analyzing the image.

00400:804500

36. A storage medium according to claim 33,
wherein the received data is the data for which the
processings up to a predetermined stage of the
processings in a plurality of stages have been
5 executed, and also the subsequent processings are
executed for the received data in said processing step.

37. A storage medium according to claim 33,
wherein the character recognizing processing is
10 executed for the received data in said processing step.

38. A storage medium according to claim 33,
further comprising the area division correcting step
of, for the data for which it is judged in the
15 judgement step that the format of the received data is
the data format which has been subjected to the area
division processing, when the correction of the area
division is instructed by a user, carrying out the
correction of the area division.

20 39. A storage medium for storing therein an image
processing control program which can be read out by a
computer, said image processing control program
comprising the steps of:

25 receiving an instruction of a data format which
has been issued from an apparatus which is connected
through a network;

executing, for image data, the processings up to a predetermined stage of the processings having a plurality of stages in accordance with the data format; and

- 5 transmitting the data which has been processed in said processing step to said apparatus.

40. A storage medium according to claim 39, wherein in said instruction receiving step, an
10 instruction to read out the data is received together with the instruction for the data format, and
said image processing control program further comprises the step of starting to read out the image data in accordance with the instruction to read out the
15 data.

41. A storage medium according to claim 39, wherein the processings of said plurality of stages include the area division of the image data and the
20 character recognition.

42. A storage medium according to claim 39, wherein the processing of dividing the area of the image data is executed in said processing step.

25

43. A storage medium according to claim 39, wherein the binarization processing for the text area

of the image data is executed in said processing step.

44. A storage medium according to claim 39,
wherein the image data is the image data which has been
5 read out from a scanner.

ABSTRACT OF THE DISCLOSURE

An apparatus for reading out a manuscript image and a data format are specified through a network, the specified data format which has been read out by the
5 apparatus is received, and the data is subjected to the necessary processing in accordance with the data format to be outputted. When inputting and receiving an image through an image input device which can be connected through a network, the image can be received in
10 accordance with the data format for which the subsequent editing processing can be executed while reducing the load with which the network is burdened.

FIG. 1

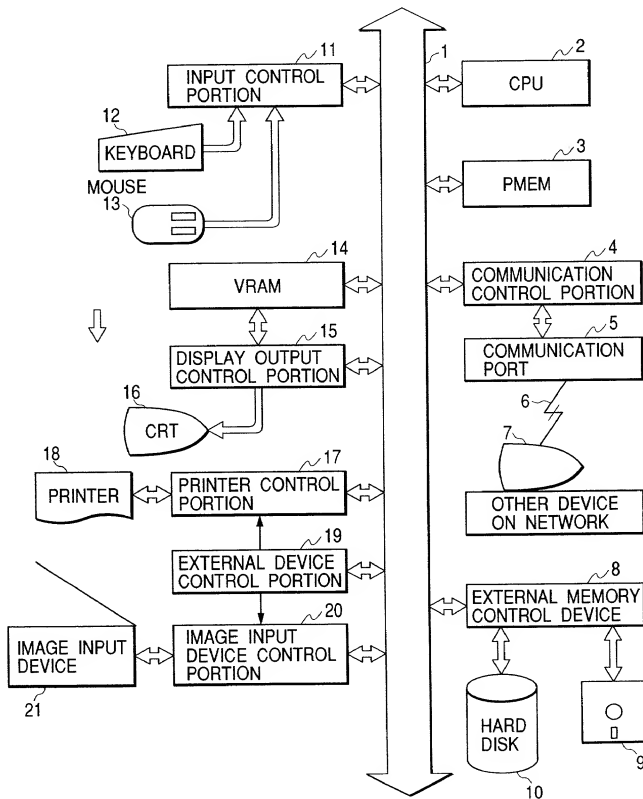


FIG. 2

WHOLE IMAGE SIZE	201
RESOLUTION	202
IMAGE DATA	203

FIG. 4

WHOLE IMAGE SIZE		401
RESOLUTION		402
410 TEXT PART 1	IMAGE SIZE	403
	IMAGE POSITION	404
	IMAGE DATA	405
TEXT PART 2	IMAGE SIZE	
	IMAGE POSITION	
	IMAGE DATA	
⋮		
411 IMAGE PART 1	IMAGE SIZE	406
	IMAGE POSITION	407
	IMAGE DATA	408
IMAGE PART 2	IMAGE SIZE	
	IMAGE POSITION	
	IMAGE DATA	
⋮		

FIG. 3

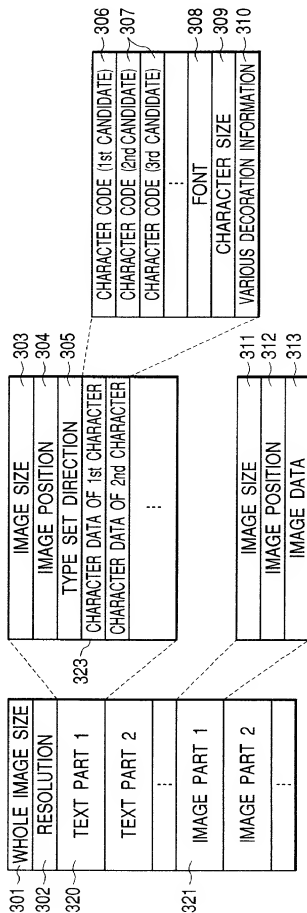


FIG. 5

「僕にとって、長いプロローグが終わり、これからようやく本当の一幕が上がろうとしている。」鹿山哲太郎

鹿山哲太郎が国立バレエ団を退団した。天賦の才に恵まれ、若くしてカンヌバレエコンクールで金賞受賞、名門国立バレエ団でプリンシパルにまで登りつめた男が、なぜ今退団を? 「人生を自分で決めなければいけないときがある」



1972年 長野県松本市に生まれる
1986年 全国コンクール第一位
1988年 レニングラードコンクール金賞
1989年 ニューヨークにバレエ団設立

来日間近！

FIG. 6

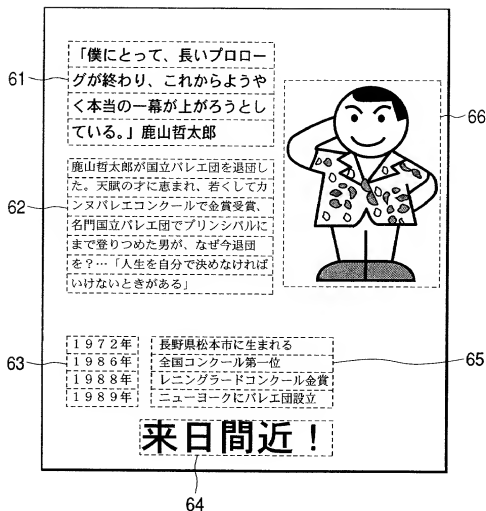


FIG. 7



FIG. 8

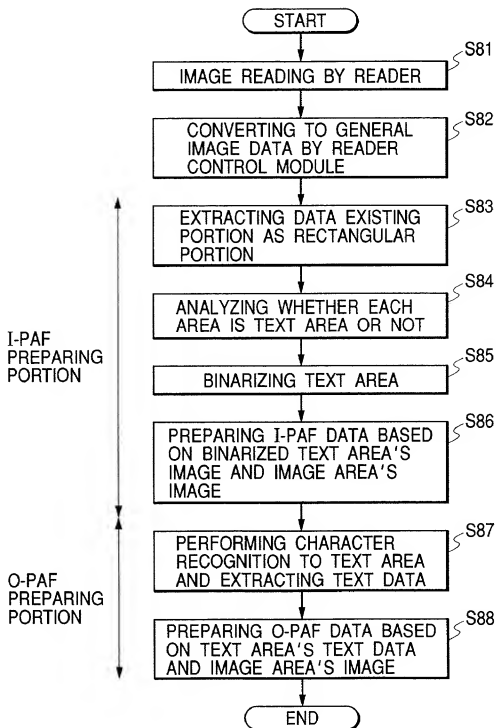


FIG. 9

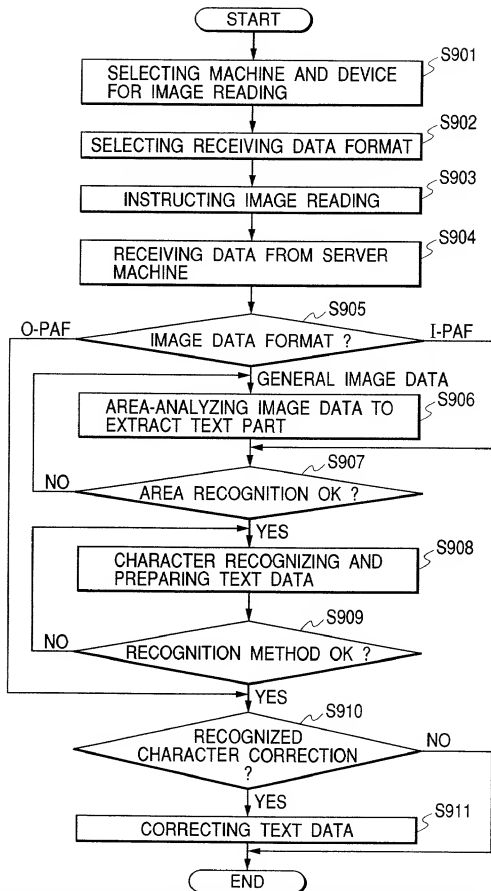


FIG. 10

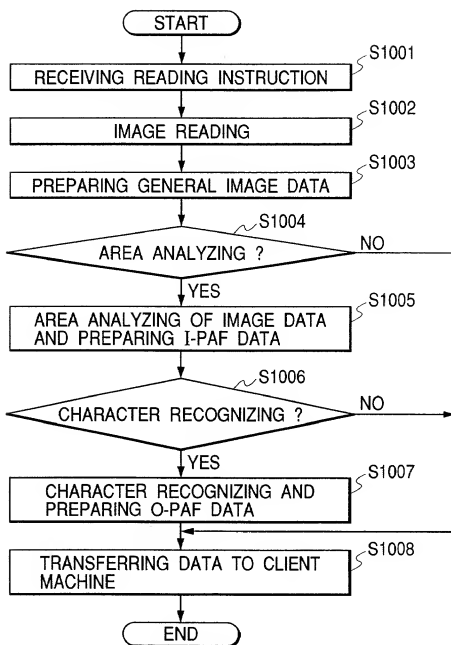


FIG. 11

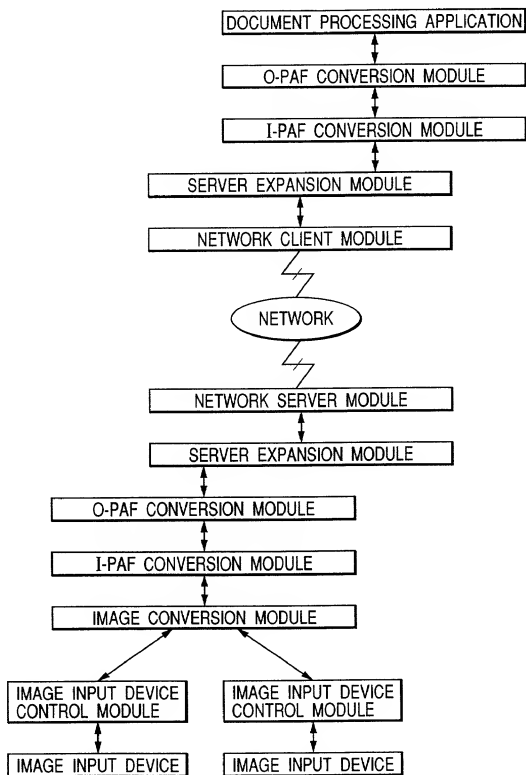


FIG. 12

READING DEVICE SELECTION

SCANNER 1201

FIG. 13


DATA FORMAT DESIGNATION

1301 ☐ GENERAL IMAGE DATA FORMAT

1302 ☒ I-PAF DATA FORMAT

1303 ☐ O-PAF DATA FORMAT

FIG. 14

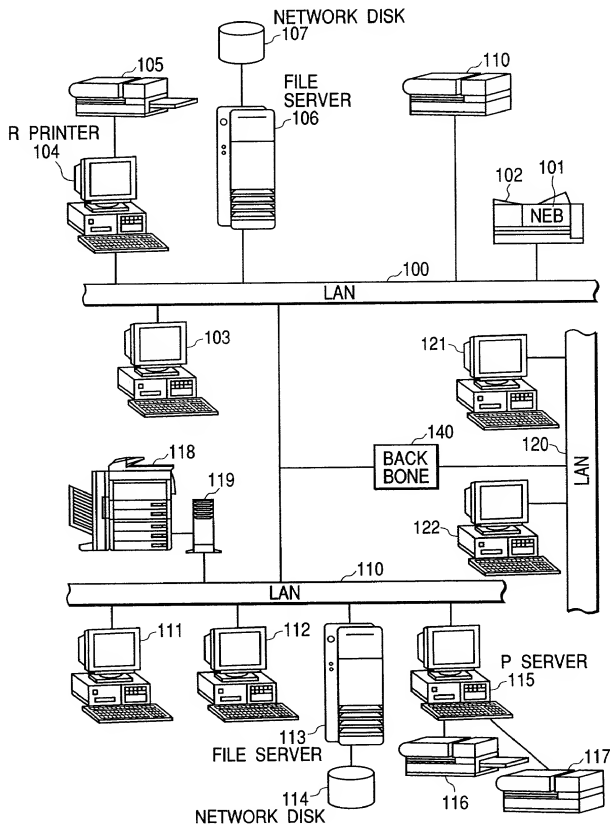

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**

(Page 1)

CFO 14405

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

IMAGE PROCESSING METHOD, APPARATUS, SYSTEM AND STORAGE MEDIUM

the specification of which ☒ is attached hereto ☐ was filed on _____ as United States Application No. or PCT International Application No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

<u>Country</u>	<u>Application No.</u>	<u>Filed (Day/Mo./Yr.)</u>	<u>(Yes/No) Priority Claimed</u>
JAPAN	11-101972	9 April 1999	YES

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor JUNICHIRO KIZAKI
 Inventor's signature *Junichiro Kizaki*
 Date April 4, 2000 Citizen/Subject of JAPAN
 Residence 8-11-202, Motokubo-cho, Nishi-ku, Yokohama-shi,
Kanagawa-ken, Japan
 Post Office Address c/o Canon Kabushiki Kaisha
30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

Full Name of Second Joint Inventor, if any _____
 Second Inventor's signature _____
 Date _____ Citizen/Subject of _____
 Residence _____
 Post Office Address _____